

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

1300 I STREET, N. W.
WASHINGTON, DC 20005-3315

202 • 408 • 4000
FACSIMILE 202 • 408 • 4400

WRITER'S DIRECT DIAL NUMBER:

ATLANTA
404 • 653 • 6400
PALO ALTO
650 • 849 • 6600

(202) 408-4096

September 2, 1999

JC584 U.S. PTO
09/389299
09/02/99

TOKYO
011 • 813 • 3431 • 6943
BRUSSELS
011 • 322 • 646 • 0353

ATTORNEY DOCKET NO.: 03327.2220

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

New U.S. Patent Application

Title: JOB EXECUTION CONTROL APPARATUS

Inventors:

1) Tetsuya KOBAYASHI and 2) Kimitake HASUIKE

Sir:

We enclose the following papers for filing in the United States Patent and Trademark Office in connection with the above patent application.

1. Application - 26 pages, including 7 independent claims and 16 claims total.
2. Drawings - 21 sheets of informal drawings, containing 23 figures.
3. Declaration and Power of Attorney.
4. Recordation Form Cover Sheet and Assignment to FUJI XEROX CO., LTD.
5. Certified copy of Japanese Patent Application No. 10-249482, filed on September 3, 1998.
6. A check for \$1112 representing a \$1072 filing fee and \$40 for recording the Assignment.
7. Information Disclosure Statement and Information Disclosure Citation, PTO 1449 with 1 document attached.

JC584 U.S. PTO
09/389299
09/02/99

09/02/99 09/02/99

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.
Assistant Commissioner for Patents
September 2, 1999
Page 2


Applicants claim the right to priority based on Japanese Patent Application No. 10-249482, filed on September 3, 1998.

Please accord this application a serial number and filing date and record and return the Assignment to the undersigned.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

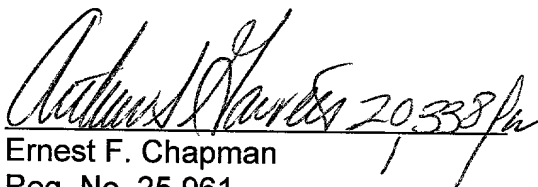By: 
Ernest F. Chapman
Reg. No. 25,961

EFC/FPD/sci
Enclosures

662060 66262660

JOB EXECUTION CONTROL APPARATUS

BACKGROUND OF THE INVENTION

5 The present invention is related to a job execution control apparatus
suitable for a document processing apparatus having a plurality of functions
such as a digital copying machine, a printer, a facsimile, and an image filing
apparatus. More specifically, the present invention is directed to a technique
for stopping plural process operations executed in a parallel manner in
10 response to an instruction of a user.

 Recently, document processing apparatuses having a plurality of
functions such as a digital copying machine, a printer, a facsimile, and an
image filing apparatus (will also be referred to as a "hybrid machine"
hereinafter) have been proposed. More specifically, in recent hybrid machines,
15 while environments under which a plurality of jobs can be executed in a parallel
manner are provided, such plural jobs are executed at the same time, for
instance, a document is stored during a document printing operation, and a
communication is established between the hybrid machines and an external
appliance during the document printing operation.

20 On the other hand, normally, such a hybrid machine owns an
operation function so as to stop a job. For example, in Japanese Patent
Publication No. 8-6745A, there is proposed such a system that all of jobs are
once caused to pause, and thereafter one job is selected to be canceled, and
subsequently the remaining jobs are automatically restarted. Since this
25 system may once make all of these jobs pause, it is convenient that a job is

urgently stopped. However, in this system, since all of the jobs are once brought into pausing states, such a job which must not be made to pause (for example, facsimile receiving operations) is also made to pause, resulting in a serious problem. Also, in an apparatus capable of executing a plurality of jobs at the same time, such a job which does not want, or not require a pausing operation would be brought into the pausing operation. As a result, overall productivity of the document processing apparatus would be lowered. Also, in this system, since only one job is canceled by a series of operations such as a pausing operation and a canceling operation, a user is forcibly required to execute the same operation plural times so as to make a plurality of jobs pause. Accordingly, in order to solve such a problem, when a user requests to stop a job, the following method may be performed. For instance, while the simultaneous operations of these plural jobs in order to confirm the job conditions are not made to pause, these jobs are displayed. A job to be stopped is selected from these displayed jobs, and a stop key is depressed with respect to the selected job to stop this job. In accordance with this method, such a job which is not wanted, or is not required to be made to pause is no longer brought into a pausing operation. However, in this system, the jobs are executed without any limitation for a time period during which a list of the jobs under execution is displayed, and a job which is required to be stopped is selected from the plural displayed jobs, and then this selected job is stopped. As a result, even when there is such a job which is required to be urgently stopped, this urgent job cannot be stopped. Consequently, even when a job under printing operation is wanted to be stopped, an ejection of useless paper cannot be avoided.

SUMMARY OF THE INVENTION

5 The present invention has been made to solve the above-described problems, and therefore, has an object to provide a job execution control apparatus capable of easily make a job pause, and furthermore, which does not unnecessarily lower a throughput of jobs.

10 It should be noted that in the following description, a document processing apparatus involves not only a stand-alone type document processing apparatus, but also such a document processing apparatus realized under a network environment in which at least portions of structural elements are distributed on the network. As portions of these structural elements, the following resources may be employed. That is, in one resource, a personal computer, a work station, and an intelligent terminal are distributed on a network. Also, in another resource, a personal computer, a work station, and an intelligent terminal are connected via a cable to a main body of a document processing apparatus.

20 In order to achieve the above object, according to the present invention, there is provided a job execution control apparatus capable of executing a plurality of jobs in a parallel manner, comprising: means for setting a condition of a job which is directed to a pausing job; means for making an execution of such a job satisfying the condition pause in response to a predetermined event; means for displaying the pausing job; and means for specifying at least one job among the displayed jobs.

25 With employment of this configuration, since only the job which is

directed to the pausing job is made to pause, this may solve such a problem that the job is unnecessarily made to pause.

The job execution control apparatus may further comprise means for stopping the specified job. In this case, since the pausing job is selected to be stopped, the job stopping process operation can be quickly performed.

The job execution control apparatus may further comprise means for restarting the specified job.

The condition of the job which is directed to the pausing job may be specified by a kind of the job, or a parameter of the job.

The pausing job displaying means may display only the pausing job, or also jobs other than the pausing job.

The predetermined event may be an instruction input operation of a user, or other events. For example, the present event may be made by a remote control. The above-described instruction input operation may be carried out by manipulating a predetermined key.

The job execution control apparatus may further comprise means for setting an additional condition under which the job pauses in addition to the condition set by the condition setting means. The additional condition may be defined by such a fact as to whether the job corresponds to a background job, or a foreground job.

According to the present invention, there is also provided a job execution control apparatus comprising: means for storing a first condition satisfied by a job which is stopped without any restriction in response to a predetermined event and a second condition satisfied by a job which pauses in response to the predetermined event; means for stopping the job satisfying the

first condition in response to the predetermined event; means for making the job satisfying the second condition pause in response to the predetermined event; means for displaying at least the pausing job; and means for designating at least one job from the displayed jobs to stop, or restart the designated job.

5 With this configuration, an effect similar to the above-explained effect can be achieved. Moreover, since the first condition under which the job is stopped without any restriction is previously determined, a desirable stopping process operation can be more quickly carried out.

10 According to the present invention, there is also provided a job execution control apparatus comprising: means for setting a condition satisfied by such a job which is stopped without any restriction in response to a predetermined event; and means for stopping the job which satisfies the set condition in response to the predetermined event.

15 Also with this configuration, since the first condition under which the job is stopped without any restriction is previously determined, a desirable stopping process operation can be more quickly carried out.

20 According to the present invention, there is also provided a job execution control apparatus capable of executing a plurality of jobs in a parallel manner, comprising: display means provided with a touch panel function, for displaying information related to one job; means for displaying a button for instructing a stop of the one job on the display means; means for stopping the one job when a touch operation is carried out with respect to the displayed button; a predetermined key provided on a portion except for the display means; means for storing a condition of a job which is directed to a pausing job; and means for making the job which satisfies the condition pause when the

25

predetermined key is operated.

In this configuration, since the means for stopping the job displayed on the display means is provided independent from the general-purpose key used to stop the job, the job can be stopped without lowering the throughput similar to the above-described apparatus. Also, a desirable job can be immediately stopped.

According to the present invention, there is also provided a job execution control apparatus comprising: means for storing a condition of a job which is directed to a pausing job; means for making the stored job pause in response to a predetermined event; means for displaying the pausing job; and means for specifying at least one job among the displayed jobs.

Also in this configuration, similar to the above case, since only the job which is directed to the pausing job is made to pause, this may solve such a problem that the job is unnecessarily made to pause.

According to the present invention, there is also provided a job execution control apparatus comprising: means for storing an attribute of a job which is directed to a pausing job; means for making a job having the stored attribute pause in response to a predetermined event; means for displaying the pausing job; and means for stopping at least one job among the displayed jobs.

With this configuration, the pausing process operation is selectively performed based upon not only the kind of jobs, but also various attributes of jobs (for example, processing amount, and cost). As a consequence, similar to the above-described manner, the job can be stopped without lowering the throughput, and moreover, the desirable job can be quickly stopped.

According to the present invention, there is also provided a job

execution control apparatus comprising: means for storing a condition of a job which is directed to a pausing job; means for making the stored job pause in response to a predetermined event; means for notifying at least an identifier of the pausing job to an instruction apparatus; and means for stopping at least one job instructed by the instruction apparatus among the pausing jobs. In this case, the instruction apparatus may be realized as a computer system such as a personal computer and a work station, which is connected to a main body of a job execution control apparatus via either a network (LAN, WAN) or a cable.

Also with this configuration, similar to the above-described manner, the job can be stopped without lowering the throughput, and moreover, the desirable job can be quickly stopped.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

Fig. 1 is a block diagram for showing an overall configuration of an embodiment according to the present invention;

Fig. 2 shows an outlook of an operation display section of the embodiment;

Fig. 3 is an example of a job management table of the embodiment;

Fig. 4 is a diagram for indicating a content of a setting storage table for a stop-key processing of the embodiment;

Figs. 5A and 5B show a flow chart for describing a setting operation of the stop-key processing;

Figs. 6A to 6D are a flow chart for mainly describing an operation

when the stop key is depressed;

Fig. 7 is a schematic diagram for mainly describing an operation when the stop key is depressed;

5 Figs. 8A to 8C is a schematic diagram for explaining an operation executed for a list of pausing jobs; and

Figs. 9 to 13E are diagrams for explaining modifications of the embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 Now, an embodiment of the present invention will be described.

15 Fig. 1 indicates an overall configuration of a document processing apparatus 10 according to the present invention. In this drawing, an operation display section 11, an image reading section 12, an image processing section 13, an image forming section 14, an image ejecting section 15, a non-volatile memory 16, a volatile memory 17, a network control section 18, and a communication control section 19 are connected to a bus 20. Also, a main control section 21 is connected to the bus 20. The respective structural sections are controlled by this main control section 21. The non-volatile memory 16 constitutes an image storage section 22, a job management table 23, and a setting storage table for stop-key processing 24. On the other hand, the volatile memory 17 constitutes a work memory 25.

20 The operation display section 11 accepts an input operation made by a user, and also displays various data. The image reading section 12
25 optically scans an original to produce data about an electronic image. The

image storage section 22 stores therein image data which is required to be processed. The image processing section 13 performs synthesizing, converting of an image. The image forming section 4 forms a hard copy from image data by using, for example, an electrostatic recording technique (known as xerography technique). The image ejecting section 15 guides a hard copy formed by the image forming section 14 to a tray and the like so as to eject this hard copy. A sorting function may be added to this image ejecting section 15, if required.

The network control section 18 is used to connect with a network. The communication control section 19 is used to connect with a telephone line.

It should also be noted that in the configuration of Fig. 1, the respective structural portions of the document processing section 10 are electrically mounted to a stand-alone type apparatus. Alternatively, either a portion or all of these structural portions are distributed to a network so as to be arranged on this network, so that a document processing system may be realized. For instance, the operation display section 11 may be electrically mounted on a network, or may be electrically realized by employing a computer system such as a personal computer arranged to be connected thereto via a cable. In this case, data may be transferred/received via either the network or the cable between the computer system and the main body of the document processing apparatus. The computer system issues an instruction to the main body of the document processing apparatus by using an identifier of a job, for example, a job ID (see Fig. 3) allocated to job information (will be discussed later).

This document processing apparatus 10 is so designed as to

execute four kinds of jobs, namely 1) a copying machine, 2) a printer, 3) a scanner, and 4) a facsimile.

A job of a copying machine corresponds to such an operation for optically reading an original to form a duplication of this optically read original, namely a well-known process operation. A job of a printer corresponds to such an operation for printing out document data transmitted via a network. A job of a facsimile corresponds to such an operation for printing out facsimile data transmitted via a telephone line, and also for transmitting predetermined image data as facsimile data via a telephone line to an external device.

A job of a scanner corresponds to such an operation for optically reading an original to produce image data and for saving this image data in a file (also will be referred to as a "scan-to-file", or a "document storage"). A file is stored into a predetermined storage location of the main body of the document processing apparatus (scan-to-mailbox), or is stored into an externally-provided computer (scan-to-server). A job template may be used to designate such that a file is stored into which externally-provided computer. In the former case, the file stored in the main body of the document processing apparatus may be accessed by a user. In the later case, another user of the externally-provided computer may access this externally-provided computer so as to utilize the file.

Fig. 2 indicates an outlook of the operation display section 11.

In Fig. 2, various kinds of buttons and the like are provided on a right side of a front surface of the operation display section 11. A liquid crystal display 50 equipped with a touch panel function is mainly provided on a left side of this front surface.

As the buttons, there are provided a start button 51, a stop button 52, a reset button 53, a power save button 54, a clear button 55, and an interrupt button 56, a ten/symbol key button 57, a specification setting button 58, a job confirmation button 59, a menu button 60, and the like.

5 A start button 51 is used to start a job instructed by a user. The
step button 52 is used to stop a job, and especially, may play an important role
in this embodiment. The reset button 53 is employed to reset all of set values
within a mode so as to return this set values to default values. The power
10 save button 54 is used to switch the document processing apparatus to the
power save mode, or to return the document processing apparatus from the
power save mode. The clear button 55 is employed to cancel an input value in
a numeral-input mode. The interrupt button 56 is used to execute an interrupt
job, or return the interrupt job to the job executed immediately before. An
15 interrupt state is displayed by a light emitting diode 56a. The ten/symbol key
button 57 is employed to enter a numeral value. For example, a telephone
number, the copy number per one manuscript, or the like. “#” and “*” buttons
are employed for dialing in a communication using the telephone line. The
specification setting button 58 is used to entry to a configuration setting screen
to set a configuration of the document processing apparatus or to exit therefrom.
20 Similar to the above-described stop button 51, this specification setting button
58 especially may play an important role in this embodiment. The relevant
operations of this specification setting button 58 will be described in detail.
The job confirmation button 59 is used to display a job condition confirmation
screen on the liquid crystal display 50. The menu button 60 is employed to
25 display a menu screen on the liquid crystal display 50.

A user depresses the menu button 60 to display the menu screen, and sets a job kind and a job parameter by employing this menu screen and the ten key button. Thereafter, the user depresses the start key 51 so as to instruct the document processing apparatus to execute the job. As to the instructed job, job information is produced, and this job information is saved in the job management table 23. For instance, as indicated in Fig. 3, the job management table 23 contains a job ID, a relevant file number, a job kind, and various kinds of job parameters with respect to each of these jobs. The job managing method is similar to the conventional job managing method, and therefore, a detailed description thereof is omitted.

Fig. 4 represents a content of the setting storage table for stop-key processing 24 of Fig. 1. This storage table content defines which process operation is carried out when the stop key 52 is depressed with respect to each of the job kinds. In this example, when the stop key 52 is depressed, the document storage job, the copy job, and the net reception job are caused to pause, the net transmission is maintained under the present state, and the document print job is stopped. Although a facsimile transmission and a facsimile reception are not indicated in this drawing, a similar definition may be made. Alternatively, as to the facsimile transmission/reception, while the user is not apparently allowed to change the configurations, no facsimile transmission/reception may be set in the setting storage table for stop-key processing 24.

Also, in the example of Fig. 4, the process operations (namely, pausing, stopping, and no action) when the stop key is operation every job kind. Alternatively, in summary, the respective process operations may be made in

correspondence with the conditions used to execute the respective process operations. As previously explained, this condition may be defined by the job kind, and otherwise may be defined by other attributes of the jobs, for example, job parameters. Also, while a processing amount, cost, and processing time are calculated based upon the job parameter, these calculation results may be compared with a predetermined threshold value so as to select the corresponding process operations. When the print job is selected, while using the number of executed pages and the number of unexecuted pages as the parameter, this print job may be selected from pausing, stopping and continuing.

Also, in the example of Fig. 4, three different kinds of processing operations, namely "pause", "stop", and "no action" have been employed. Alternatively, only two kinds of processing operations such as "stop" and "no action" may be employed.

Next, a description will now be made of setting operations for the setting storage table for stop-key processing 24 shown in Fig. 4.

Setting of the setting storage table for stop-key processing 24 may be carried out by manipulating the specification setting button 58 of Fig. 2. Next, an setting operation for the stop-key processing will be explained. Figs. 5A and 5B indicate the setting operation for the stop-key processing. In these drawings, when a user requests a setting operation for a stop-key processing (S11), process operations after a step_S12 are carried out. The request is attained by, for example, depressing the specification setting button 58 to display a specification setting menu on the liquid crystal display 50, and then selecting an entry to the setting operation.

First, the present content of the setting storage table for stop-key processing 24 of the non-volatile memory is copied to the work memory 25 so as to prepare the setting operation (S12). Also, a setting window (see Fig. 7) is opened to display therein the present set value (S13 and S14). Thereafter, in response to operation by the user, actions are set with respect to the document storage job, the copy job, the document print job, the network transmission job, and the network reception job (S20 to S29 of Fig. 5B). The current settings are displayed in the window (S14). When these settings are desirable, the user manipulates a "close" button (S15). In response to the manipulation of this "close" button, the set value of the work memory 25 is stored into the setting storage table for stop-key processing 24 of the non-volatile memory 16, and at the same time, the setting window is closed (S18 and S19).

To the contrary, when the setting is not desirable, the user manipulates a "cancel" button. In response to the manipulation of this cancel button, such a setting which has been temporarily stored in the storage area corresponding to the work memory 35 is deleted, and the setting window is closed (S16, S17 and S19).

Fig. 7 schematically shows the above setting operations. In the beginning, the settings of the stop-key processing are indicated as those of Fig. 7. In this example, a "stop (delete)" button, a "pause" button, a "no-operation" button are provided in an array with respect to each of the job kinds, and the set values are displayed in the invert mode. For instance, it can be seen that the "pause" button is displayed in the invert mode in the document storage job, and the "pause" operation is set. The user may make a selection by manipulating

the set value button as desired. The selection is conducted exclusively and thus selected button is turned to the invert mode. When the selected setting is made coincident with the desirable one, the user manipulates the "close" button so as to close the setting window, so that the setting process operation is accomplished. When the user does not want to make the setting effective, this user manipulates the "cancel" button to accomplish the setting operation.

Next, a description will now be made of process operations executed when the stop key 52 is depressed. Figs. 6A to 6D show a flow chart for describing process operations when the stop key 52 is depressed. Figs. 8A to 8C schematically indicate operations of this key manipulation.

In Figs. 6A and 6B, when any one of the keys is depressed the key operation is detected and an operation corresponding to this key operation is executed (S31 and S32). The process operation executed when the stop key is manipulated will now be explained in detail. When the manipulation of the stop key is detected, a top job information in a job management section is referred (S31 and S33). Then, process operations related to this job are carried out at steps S34 to S44. In process operations defined after these steps S34 to S44, the job information of the job management section is sequentially applied until the last job information (S45 and S46). In the case that the subject job is the document storage job at the steps S34 and S35, the preset process operation is carried out. In this case, the pausing operation is carried out (Fig. 4). It should be understood that this pausing operation will be discussed later in detail with reference to Figs. 6C and 6D. Similarly, when the subject job is the copy job, the pausing operation is carried out (S37 and S38, Fig. 4). When the subject job is the document job, the job is stopped (S39 and

S40, Fig. 4). When the subject job is the network transmission, no action is carried out (S41 and S42, Fig. 4). When the subject job is the network reception, the job is brought into the pausing state (S43 and S44, Fig. 4).

When the above-explained process operations as to all of the jobs are completed, a further process operation with respect to the pausing job is carried out (S45).

Referring now to Figs. 6C and 6D, a description will be made of operations executed when a job is made to pause. In Figs. 6C and 6D, a new window is first opened to display a list (Fig. 8A) of pausing job (S47). Then, an automatic restarting timer is initiated (S48). This automatic restarting timer can avoid such a fact that the pausing condition is left. When a job is selected from the list, an operating window of this job is displayed. For example, if the "network reception" shown in Fig. 8A is selected, an operation window of the "network reception" is displayed as shown in Fig. 8B. Within this window, a "stop (delete)" button and a "restart" button are provided by which a user may select process operations corresponding thereto (S49 and S50). Then, at this time, the automatic restarting timer is again initiated (S51).

Thereafter, when the "stop (delete)" button is manipulated (S52, S53, S54), the job under selection is stopped. In other words, the job is deleted from the job management section, and the related file is deleted from the image storage section (S55).

Also, when the "restart" button is manipulated, the job under selection is restarted (S57 and S58).

After the above-described process operations of stopping and restarting the job have been carried out, the CPU judges as to whether or not a

pausing job is still left in the list of the pausing job. When no pausing job is left, the process operation is accomplished (S56). Conversely, when the pausing job is still left, the automatic restarting timer is again initiated. Thereafter, the operating window of the job whose process operation is ended is closed and the list of the pausing job is displayed as shown in Fig. 6C (S56, S59, and S60). Then, the process operation is returned to the previous step S49.

On the other hand, in such a case that the "close" button is manipulated at the step S53, all of the jobs brought into the pausing states are again started and the window for the list of the pausing jobs is closed (S62 and S63). Also, when the key is not manipulated and thus the automatic restarting timer times up, the process operation is advanced to a step S63 at which the job brought into the pausing state is restarted and the window for this list is closed (S61, S62, and S63).

Again, Fig. 8A indicates such a condition that the stop key is depressed to bring three jobs (copy, document storage, and net reception jobs) to the pausing states. Such a job which has been set to be stopped is being stopped at this stage. Also, another job to which "no action" is set is still executed continuedly.

In Fig. 8A, the user may select the job of "net reception". As a consequence, as indicated in Fig. 8B, the operation window of "net reception" is displayed. In this case, the user selects either "restart" or "stop (delete)" so as to execute an operation corresponding to the job of the "net reception". In this manner, the job of "net reception" is derived from the pausing state. Then, the remaining jobs of "copy" and "document storage" are displayed on the window for the list of pausing jobs.

Thus, the description of the operations of the embodiment are accomplished. It should also be noted that the present invention is not limited to the above-described embodiments, but may be modified and changed without departing from the scope and spirit of the present invention. Next, modifications of the preferred embodiment will now be explained.

Fig. 9 illustrates a setting operation of a facsimile job when a stop key is depressed. In this example, the facsimile job is set independent from setting of other job kinds. As to the facsimile job, an option of "pausing" is not set, because the pausing operation of the facsimile job is equal to the stopping operation thereof.

Fig. 10 represents a modification wherein the setting operation of the facsimile job can be carried out on the same screen where the setting operations of other jobs are performed.

Fig. 11 represents a modification wherein a range to which the setting of stop-key processing is applied can be defined. In other words, the application range can be varied by such a fact as to whether or not a job corresponds to a foreground. In this case, a job of a foreground corresponds to a job whose execution condition is displayed on the liquid crystal display 50. It can be understood that the foreground job is a job most closely related to the user who directly manipulates the necessary operation in the front of the document processing apparatus 10. In Fig. 11, when the user instructs "only foreground", only the process operation for the foreground is made to pause, and directly continued in accordance with the content of the setting storage table for stop-key processing. When the user selects "all jobs", the background job is similarly processed in accordance with the content of the

setting storage table for stop-key processing. When the user situated in front of the document processing apparatus is highly emphasized, "all jobs" would be selected. In this case, the pausing job of the background may be selectively carried out as the stopping operation or the restarting operation. Conversely, when the user located removed from the document processing apparatus is highly emphasized, the "only foreground" may be selected. In this case, even when the user situated in front of the document processing apparatus depresses the stop key, the job of the background cannot be controlled.

Fig. 12 indicates such a display condition that while a state of a job under execution is displayed on the liquid crystal display 50, a key used to stop this job execution is displayed on the liquid crystal display 50. In this case, the job whose execution state is indicated is the foreground job which is a job most closely related to the user situated in front of the document processing apparatus 10. Thus, the user can intuitively understand that the stop key is related to the job of this foreground. As a result, while the user manipulates this key, the user can stop the job of the foreground in the user-friendly manner.

Figs. 13A to 13E represent such display conditions that while the user may select all of the jobs in the list of the pausing jobs by way of the "select all" buttons, the user may collectively execute the restarting operation and the stopping operation. In Fig. 13B, the restarting operation and the stopping operation are separately step similar to those as explained with reference to Figs. 8A to 8C. In this condition, if a "detailed information" button is manipulated by the user, detailed information of the subject job is displayed as shown in Fig. 13C. As shown in Fig. 13D, while the "select all" button is manipulated, both the restarting operation and the stopping operation can be

carried out with respect to all of the jobs in batch. Alternatively, after the "select all" button is manipulated, certain jobs can be individually selected to cancel the selection and the remaining jobs may be restarted, or stopped in batch as shown in Fig. 13E.

- 5 As previously described, according to the present invention, since the condition of the pausing job is designated in response to a predetermined event, it is possible to avoid that the jobs are unnecessarily made to pause and therefore the throughput would be lowered. Also, the stopping process operation can be quickly carried out.

WHAT IS CLAIMED IS:

1 1. A job execution control apparatus capable of executing a plurality of
2 jobs in a parallel manner, comprising:

3 means for setting a condition of a job which is directed to a pausing
4 job;

5 means for making an execution of such a job satisfying the condition
6 pause in response to a predetermined event;

7 means for displaying the pausing job; and

8 means for specifying at least one job among the displayed jobs.

1 2. The job execution control apparatus as set forth in claim 1, further
2 comprising means for stopping the specified job.

1 3. The job execution control apparatus as set forth in claim 1, further
2 comprising means for restarting the specified job.

1 4. The job execution control apparatus as set forth in claim 1, wherein
2 the condition of the job which is directed to the pausing job is specified by a
3 kind of the job.

1 5. The job execution control apparatus as set forth in claim 1, wherein
2 the condition of the job which is directed to the pausing job is specified by a
3 parameter of the job.

1 6. The job execution control apparatus as set forth in claim 1, wherein
2 the pausing job displaying means displays only the pausing job.

1 7. The job execution control apparatus as set forth in claim 1, wherein
2 the pausing job displaying means also displays jobs other than the pausing job.

1 8. The job execution control apparatus as set forth in claim 1, wherein
2 the predetermined event is an instruction input operation of a user.

1 9. The job execution control apparatus as set forth in claim 1, further
2 comprising means for setting an additional condition under which the job
3 pauses in addition to the condition set by the condition setting means.

1 10. The job execution control apparatus as set forth in claim 9, wherein
2 the additional condition is defined by such a fact as to whether the job
3 corresponds to a background job, or a foreground job.

1 11. A job execution control apparatus comprising:
2 means for storing a first condition satisfied by a job which is stopped
3 without any restriction in response to a predetermined event and a second
4 condition satisfied by a job which pauses in response to the predetermined
5 event;

6 means for stopping the job satisfying the first condition in response
7 to the predetermined event;

8 means for making the job satisfying the second condition pause in

9 response to the predetermined event;

10 means for displaying at least the pausing job; and

11 means for designating at least one job from the displayed jobs to
12 stop, or restart the designated job.

1 12. A job execution control apparatus comprising:

2 means for setting a condition satisfied by such a job which is
3 stopped without any restriction in response to a predetermined event; and

4 means for stopping the job which satisfies the set condition in
5 response to the predetermined event.

1 13. A job execution control apparatus capable of executing a plurality of
2 jobs in a parallel manner, comprising:

3 display means provided with a touch panel function, for displaying
4 information related to one job;

5 means for displaying a button for instructing a stop of the one job on
6 the display means;

7 means for stopping the one job when a touch operation is carried out
8 with respect to the displayed button;

9 a predetermined key provided on a portion except for the display
10 means;

11 means for storing a condition of a job which is directed to a pausing
12 job; and

13 means for making the job which satisfies the condition pause when
14 the predetermined key is operated.

14. A job execution control apparatus comprising:
 means for storing a condition of a job which is directed to a pausing
 job;
 means for making the stored job pause in response to a
 predetermined event;
 means for displaying the pausing job; and
 means for specifying at least one job among the displayed jobs.

15. A job execution control apparatus comprising:
 means for storing an attribute of a job which is directed to a pausing
 job;
 means for making a job having the stored attribute pause in
 response to a predetermined event;
 means for displaying the pausing job; and
 means for stopping at least one job among the displayed jobs.

16. A job execution control apparatus comprising:
 means for storing a condition of a job which is directed to a pausing
 job;
 means for making the stored job pause in response to a
 predetermined event;
 means for notifying at least an identifier of the pausing job to an
 instruction apparatus; and
 means for stopping at least one job instructed by the instruction

662000" 66262250

9 apparatus among the pausing jobs.

ABSTRACT OF THE DISCLOSURE

Various settings are stored into a setting storage table for stop-key processing. These settings are related to a job kind where an operation is stopped by manipulating a stop key, a job kind where an operation is made to pause, and a job kind where an operation is continued without any interruption. When the stop key is manipulated, the job set to the stop operation is directly stopped, and the job set to the execution continuation is continuously executed. The jobs set to the pausing operations are displayed in a list. These jobs are selected one by one, or in a batch mode. Thereafter, either the stop operation or the restart operation is instructed. Accordingly, even under such an environment that a plurality of jobs are executed in a parallel manner, a desirable job can be quickly stopped, and moreover, lowering of throughputs of other jobs can be suppressed.

Fig. 1

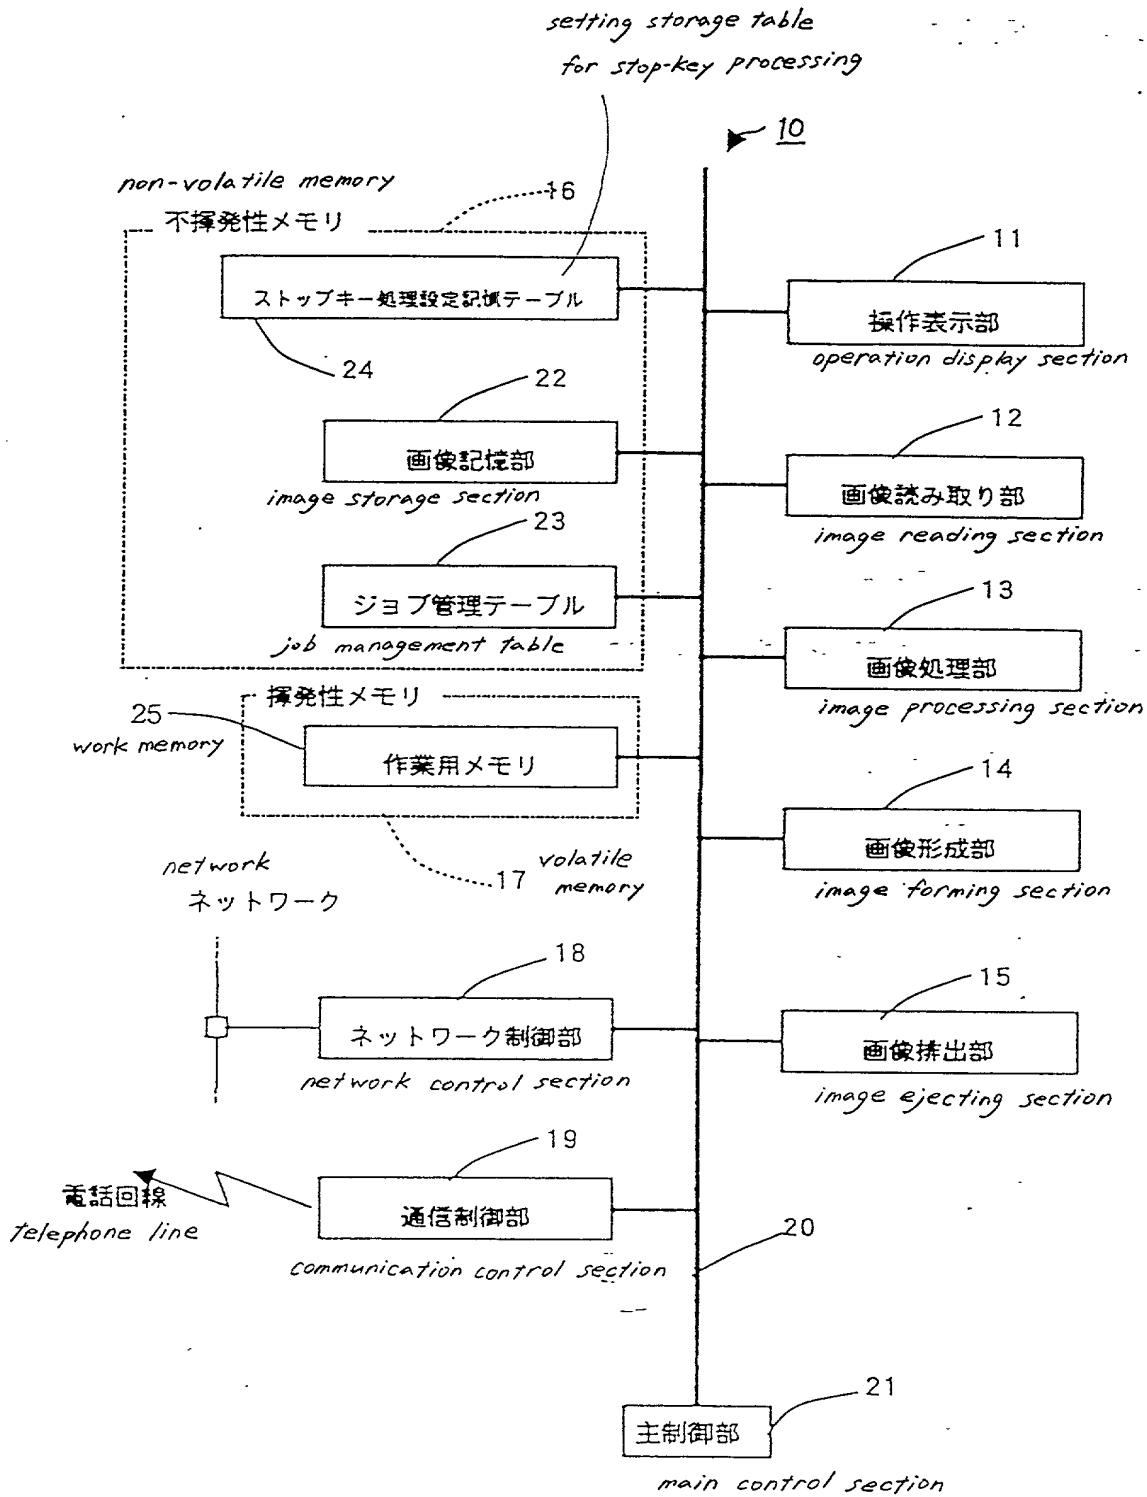


Fig. 2

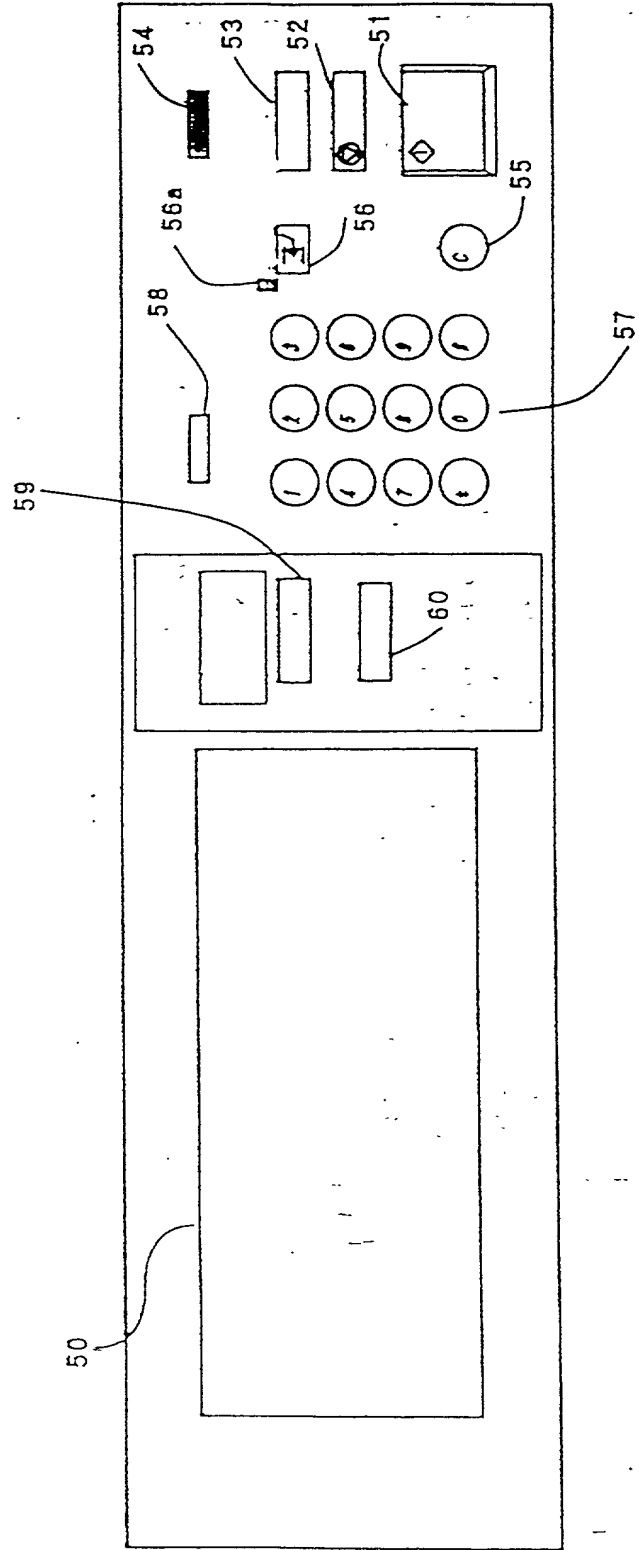



Fig. 3

job ID	related file number	job kind	parameters for processing jobs
2	24	copy	size: A4, number: 10, print mode: one side to both sides
3	89	storage	destination: <i>mailbox</i> 001, size: A4
5	32	network transmission	name: function specification, page: 1/5
21	106	network reception	host/user name: Hasuiki:Klee, page: 1/5
...

Fig. 4


job kind	stop-key processing
storage	pause
copy	pause
print out	stop (delete)
network transmission	no action
network reception	pause

Fig. 5A

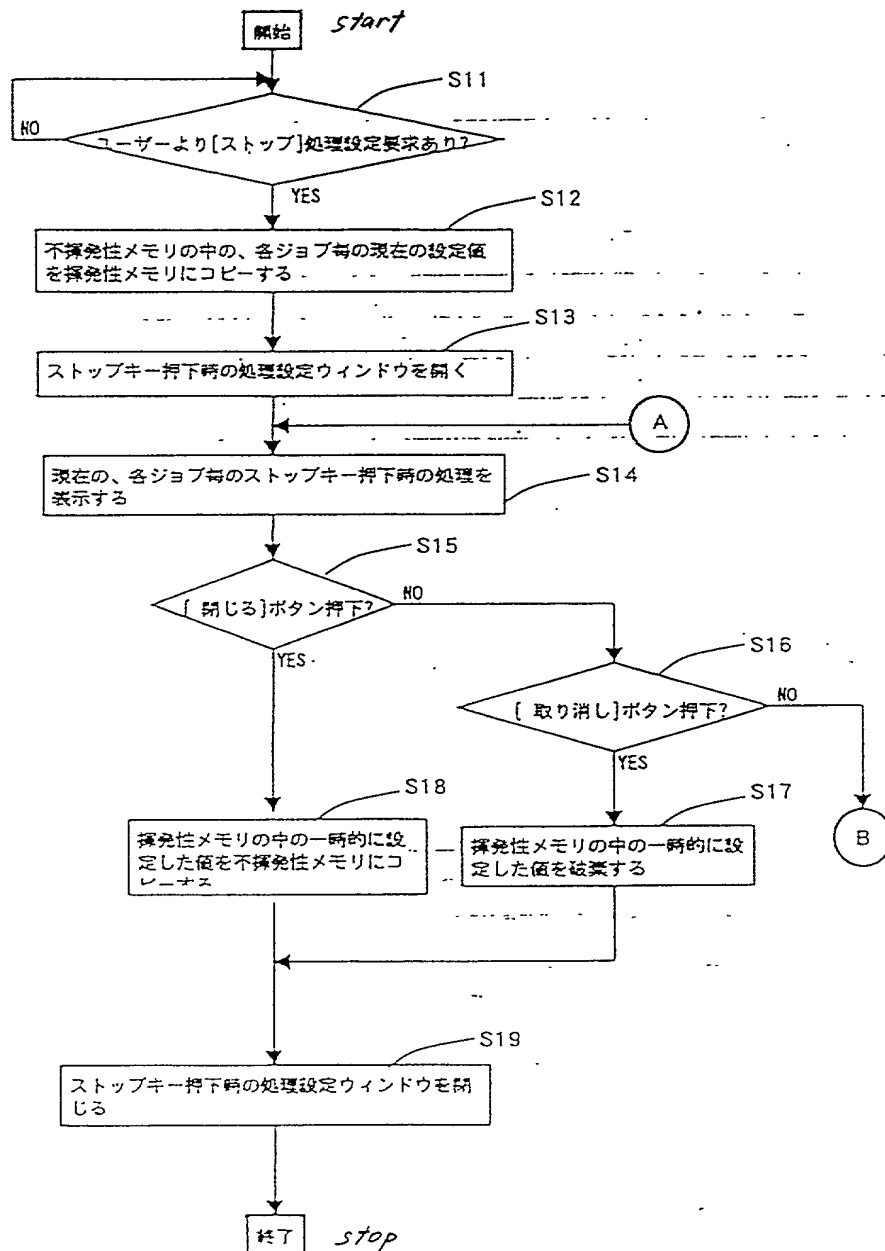

- S11: setting operation for stop-key processing is requested by user?
- S12: copy current setting of each job in non-volatile memory to volatile memory
- S13: open window of setting operation for stop-key processing
- S14: display current setting of each job
- S15: "close" button is depressed?
- S16: "cancel" button is depressed?
- S17: delete temporary setting in volatile memory
- S18: copy temporary setting in volatile memory to non-volatile memory
- S19: close window of setting operation for stop-key processing

Fig. 5B

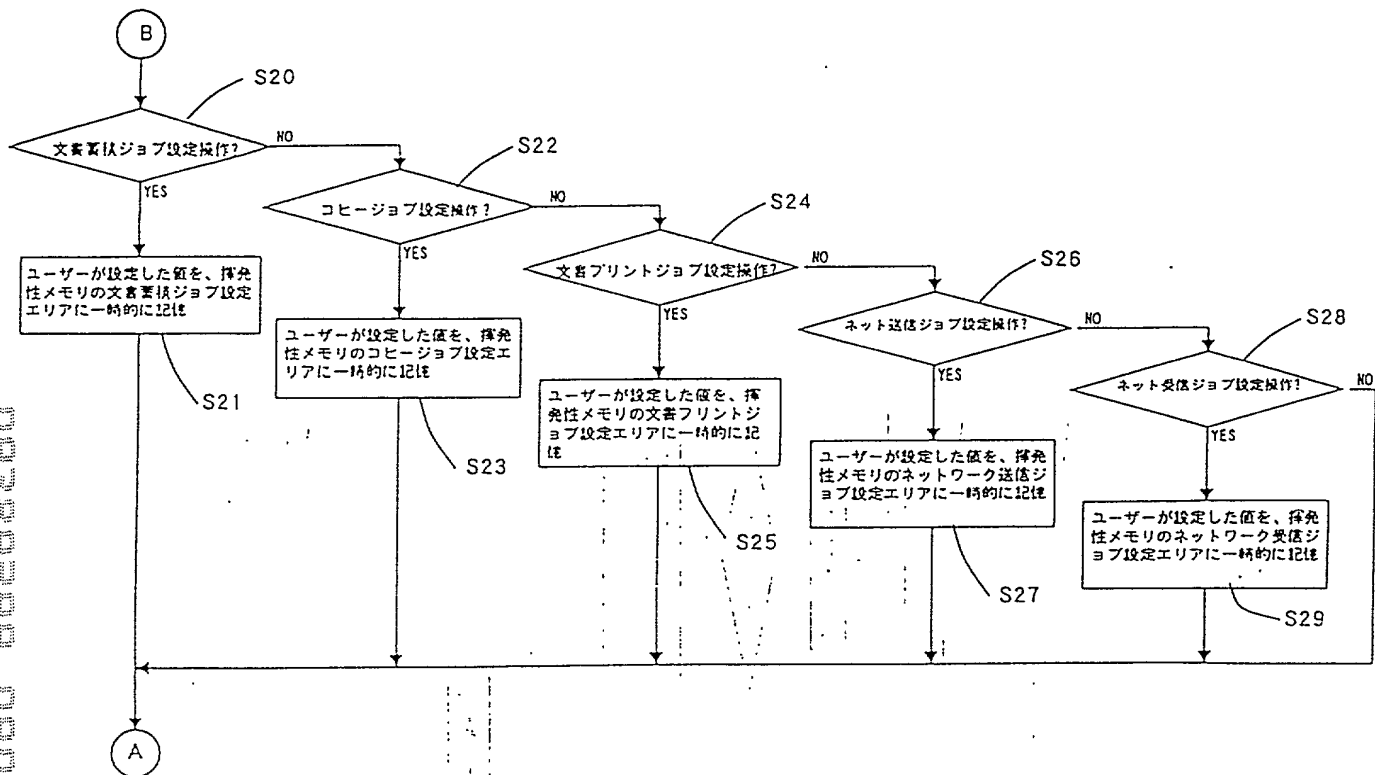

S20: storage job?

S21: store value set by user into storage job setting area in non-volatile memory temporarily

S22: copy job?

S23: store value set by user into copy job setting area in non-volatile memory temporarily

S24: print job?

S25: store value set by user into print job setting area in non-volatile memory temporarily


S26: network transmission job?

S27: store value set by user into network transmission job setting area in non-volatile memory temporarily

S28: network reception job?

S29: store value set by user into network reception job setting area in non-volatile memory temporarily

Fig. 6A

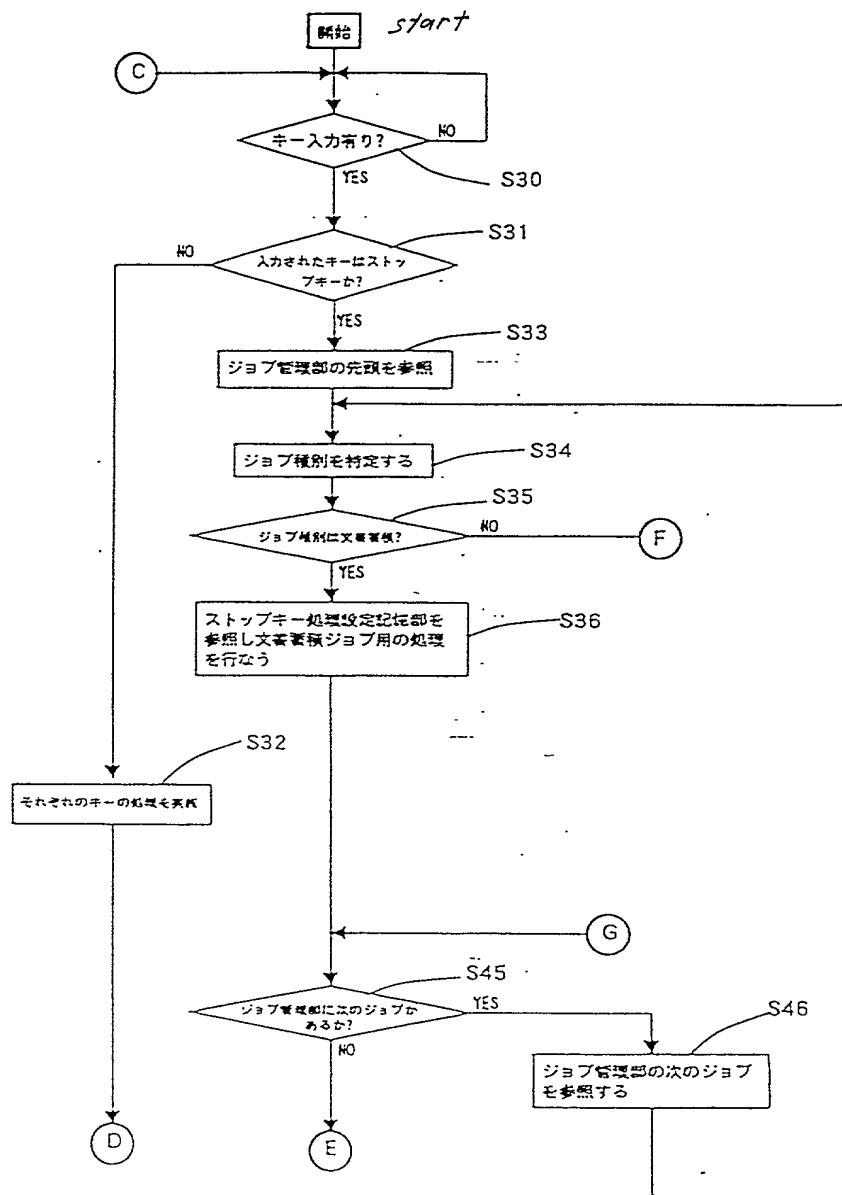

S30: key input is detected?

S31: stop key is depressed?

S32: execute processing related to key input

S33: refer to top job in job management section

S34: specify job kind


S35: storage job?

S36: refer to setting storage section for stop-key processing and execute processing for storage job

S45: next job exists in job management section?

S46: refer to next job in job management section

Fig. 6B

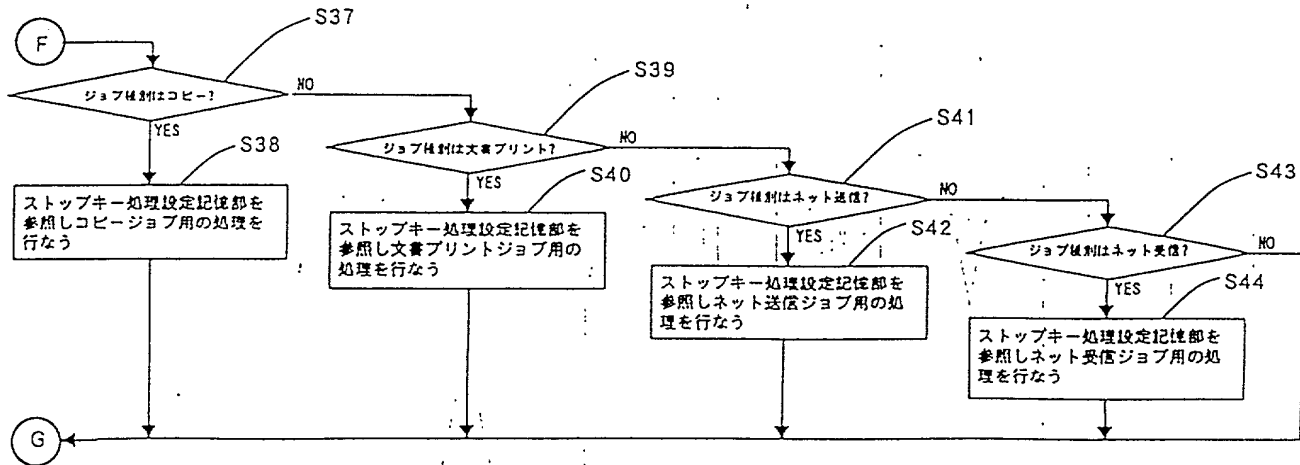

S37: copy job?

S38: refer to setting storage section for stop-key processing and execute processing for copy job

S39: print job?

S40: refer to setting storage section for stop-key processing and execute processing for print job


S41: network transmission job?

S42: refer to setting storage section for stop-key processing and execute processing for network transmission job

S43: network reception job?


S44: refer to setting storage section for stop-key processing and execute processing for network reception job

Fig. 6C

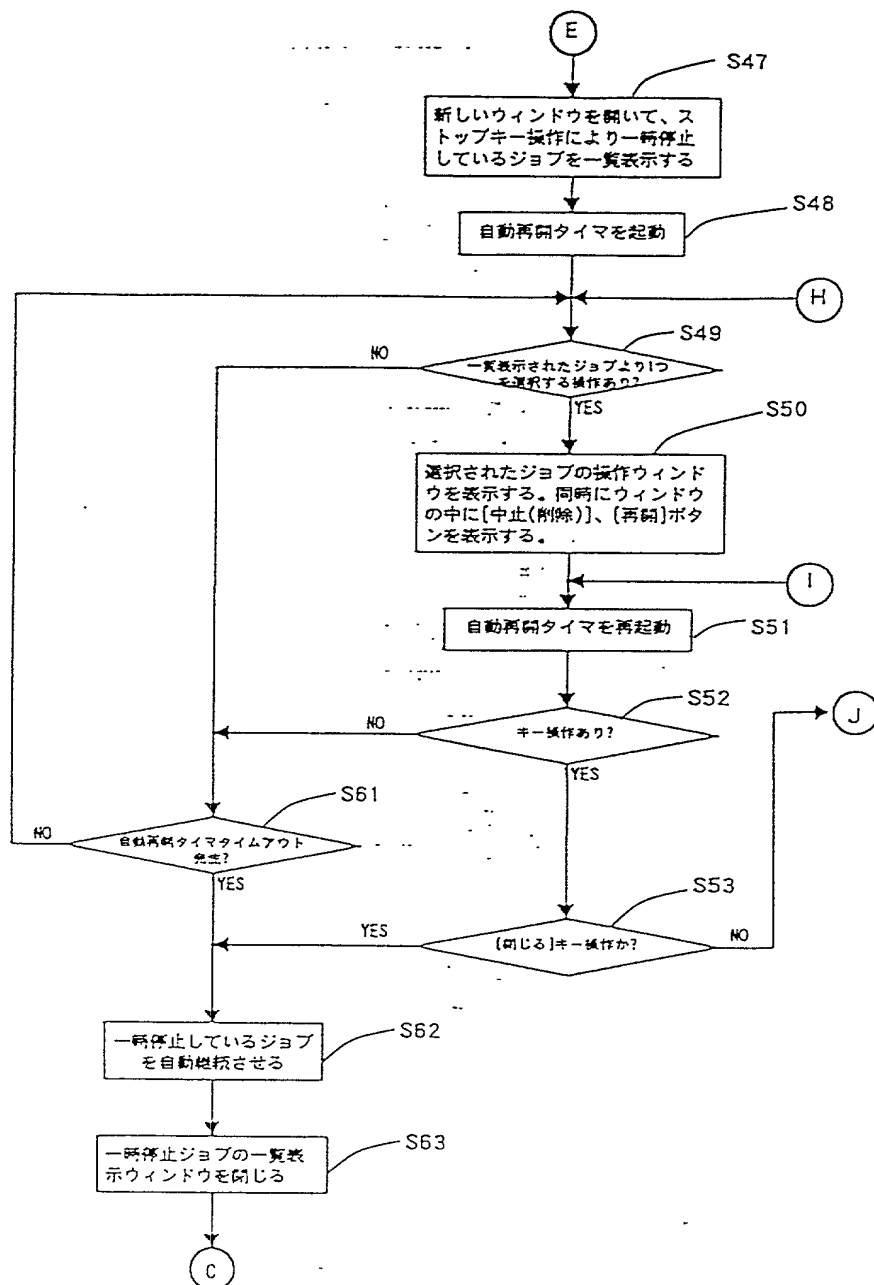

- S47: open new window and display pausing job list
- S48: activate automatic restart timer
- S49: one job is selected from pausing job list?
- S50: display operation window of selected job, stop(delete) button and restart button
- S51: activate automatic restart timer again
- S52: button manipulation is detected?
- S53: close button is manipulated?
- S61: time out of automatic restart timer?
- S62: restart pausing job automatically
- S63: close pausing job list

Fig. 6D

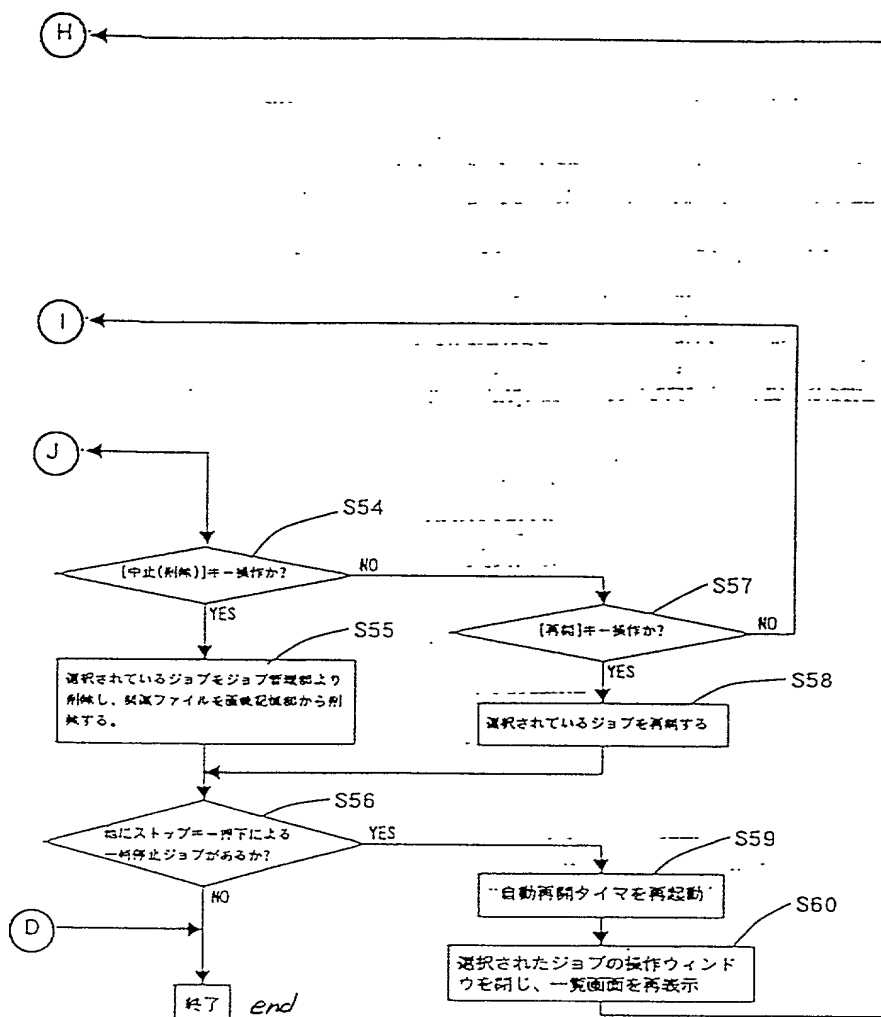

S54: stop(delete) button is manipulated?

S55: delete selected job from job management section and delete related file from image storage section

S56: any other pausing job exists?

S57: restart button is manipulated?

S58: restart selected job

S59: activate automatic restart timer again

S60: close operation window of selected job and display pausing job list again

Fig. 7

仕様設定画面です。ハード[ストップ]キーを押した時のジョブの処理を設定してください。

[ストップ] キー押下時の処理			取り消し	閉じる
文書蓄積	コピー	プリント	ネット送信	ネット受信
中止(削除)	中止(削除)	中止(削除)	中止(削除)	中止(削除)
一時停止	一時停止	一時停止	一時停止	一時停止
何もしない	何もしない	何もしない	何もしない	何もしない

Specification Setting:

Please set a processing when "stop" key is depressed with respect to each job.

Stop-key Processing:

cancel

close

storage

copy

print

network transmission

network reception

stop (delete)

pause

no action

Fig. 8A

一時停止				閉じる
以下のジョブを一時停止しました。 ジョブを選択して、指示をしてください。				
コピー	コピー	A4: 100%:片面→両面	5 / 10	ページ切替
文書蓄積	スキャナー	親展ボックス001	5	
ネット受信	プリンター	Hasuike: Klee	20%	

Pausing:

close

Following jobs are subjected to pausing state.

Please select one job and input an instruction.

page change

copy	copy	A4: 100%: one side to both sides	5/10
storage	scanner	mailbox 001	5
network reception	printer	Hasuike: Klee	20%

662060"66262E50

Fig. 8B

一時停止

閉じる

以下のジョブが一時停止しています。
ジョブを終える時は「再開」を、中止する時は「中止(削除)」ボタンを押してください。

種別	: ネット受信
ジョブ	: プリンター
送信元	: Hasuile: Klee
進行状況	: 20%

再開

中止(削除)

Pausing:

close

Following jobs are now pausing.

Please depress "restart" button if you want to continue the job.

Please depress "stop(delete) button if you want to stop the job.

job kind: network reception

job: printer

sender: Hasuile: Klee

progress condition: 20%

restart stop(delete)

Fig. 8C

一時停止

以下のジョブを一時停止しました。
ジョブを選択して、指示をしてください。

コピー	コピー	A4: 100%:片面→両面	5 / 10	ページ切替
文書蓄積	スキャナー	親展ボックス001	5	

△ ▽

Pausing:

close

Following jobs are subjected to pausing state.

Please select one job and input an instruction.

page change

copy

copy

A4: 100% one side to both sides 5/10

storage

scanner

mailbox 001

5

Fig. 9

仕様設定画面です。
ハード[ストップ]キーを押した時のジョブの処理を設定してください。

[ストップ] キー押下時の処理	取り消し	決定
-----------------	------	----

ファックス送信	ファックス受信
中止(削除)	中止(削除)
何もしない	何もしない

Specification Setting:

Please set a processing when "stop" key is depressed with respect to each job.

Stop-key Processing:

cancel

close

facsimile transmission

facsimile reception

stop (delete)

no action

Fig. 10

仕様設定画面です。
ハード「ストップ」キーを押した時のジョブの処理を設定してください。

[ストップ] キー押下時の処理		取り消し ...	決定			
文書蓄積	コピー	プリント	ネット送信	ネット受信	ファクス送信	ファクス受信 ...
中止(削除)	中止(削除)	中止(削除)	中止(削除)	中止(削除)	中止(削除)	中止(削除)
一時停止	一時停止	一時停止	一時停止	一時停止	何もしない	一時停止
何もしない	何もしない	何もしない	何もしない	何もしない		何もしない

Specification Setting:

Please set a processing when "stop" key is depressed with respect to each job.

Stop-key Processing:

cancel

close

storage

copy

print

network transmission

network reception

stop (delete)

pause

no action

facsimile transmission

facsimile reception

stop (delete)

no action

662060-66268660

Fig. 11

仕様設定画面です。
ハードストップキーを押した時のジョブの処理を設定してください。

[ストップ] キー押下時の処理

取り消し... 決定

対象とする
ジョブ

アクティブジョブ
すべてのジョブ

Specification Setting:

Please set a processing when "stop" key is depressed with respect to each job.

Stop-key Processing:

cancel

close

subject job

only foreground

all jobs

Fig. 12

プリンター

表示終了

プリントしています。

ストップ

ページ 部数

20 / 20 1 / 3

文書名 : 機能仕様書ドラフト.doc

発信元 : Kimitake-Hasuike / Klee

モード : PostScript / NetWare(Pserver)

用紙 : A4 / トレイ / 両面プリント

Printer:

close

Now printing.

stop

page circulation

name: draft.doc

sender: Kimitake-Hasuike / Klee

mode: postscript / netware (pserver)

paper: A4 / tray 1 / both sides printing

Fig. 13A

一時停止				閉じる
以下のジョブを一時停止しました。 ジョブを選択して、指示をしてください。				
文書蓄積	スキャナー	親展ボックス001	5	再開 中止 詳細情報
ネット受信	プリンター	機能仕様書	20%	
ネット送信	スキャナー	Hasuiké: Klee	20%	
<input type="checkbox"/> 17:52 <input type="button" value="▲"/> <input type="button" value="▼"/>				すべてを選択

Pausing:

close

Following jobs are subjected to pausing state.

Please select one job and input an instruction.

storage	scanner	mailbox 001	5
network reception	printer	function specification	20%
network transmission	copy	Hasuiké: Klee 5/10	20%

restart

stop

select all

detailed information

Fig. 13B

一時停止

閉じる

以下のジョブが一時的に停止しています...

文書蓄積	スキャナー	親展ボックス001	5	再開
ネット受信	プリンター	機能仕様書	20%	中止
ネット送信	コピー機	Hasuike: Klee 5/10	20%	

すべてを選択

詳細情報

Pausing:

close

Following jobs are subjected to pausing state.

Please select one job and input an instruction.

storage	scanner	mailbox 001	5
network reception	printer	function specification	20%
network transmission	copy	Hasuike: Klee 5/10	20%

restart

stop

select all

detailed information

Fig. 13C

一時停止		閉じる
以下のジョブが一時停止しています。 ジョブを続ける時は「再開」を、中止する時は「中止(削除)」ボタンを押してください。		
種別	: ネット送信	
ジョブ	: スキャナー	
保存先	: 郵便ボックス001 - 庶務管理用ボックス	
進行状況	: 20%	
再開		中止(削除)

Pausing:

close

Following jobs are now pausing.

Please depress "restart" button if you want to continue the job.

Please depress "stop(delete) button if you want to stop the job.

job kind: network transmission

job: scanner

destination: mailbox 001 - general affairs storage box

progress condition: 20%

restart stop(delete)

Fig. 13D

Fig. 13E

Pausing:

close

Following jobs are subjected to pausing state.

Please select one job and input an instruction.

storage	scanner	mailbox 001	5
network reception	printer	function specification	20%
network transmission	copy	Hasuiki: Klee 5/10	20%

restart

stop

select all

detailed information

DECLARATION AND POWER OF ATTORNEY

I, a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: _____

JOB EXECUTION CONTROL APPARATUS

The specification of which ☒ is attached and/or ☐ was filed as United States Application Serial No. _____ on _____ and was amended on _____ (if applicable); or was filed as PCT International Application No. _____ on _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119
Japan	P. Hei. 10-249482	September 3, 1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.**, Reg. No. 22,540; Douglas B. Henderson, Reg. No. 20,291; David F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Elmer, Reg. No. 25,857; Richard L. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; and _____. Please address all correspondence to FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P. 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of First Inventor Tetsuya Kobayashi	Inventor's Signature <i>Tetsuya Kobayashi</i>	Date August 26, 1999
Residence Kanagawa, Japan	Citizenship Japan	
Post Office Address C/O FUJI XEROX CO., LTD., YBP East Tower Bldg. 13F, 134, Godo-cho, Hodogaya-ku, Yokohama-shi, Kanagawa, Japan		

Listing of Inventors Continued on Page 2 hereof. ☒ Yes ☐ No

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

HFHGD 9/95

Full Name of Second Inventor	Inventor's Signature <i>Kimitake Haseike</i>	Date August 26, 1999
Residence Kanagawa, Japan	K.H. August 26, 1999	
Post Office Address c/o FUJI XEROX CO., LTD., YBP East Tower Bldg. 13F, 134, Godo-cho, Hodogaya-ku, Yokohama-shi, Kanagawa, Japan	Citizenship Japan	
Full Name of Third Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Fourth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Fifth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Sixth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Seventh Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Eighth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Ninth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Tenth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		